

LIGHTING KIT

TF NM5.5




TRANSPORT




TRUCK 13.60 m	18 towers
CONTAINER 12 m	16 towers
CONTAINER 5 m	6 towers


TF NM5.5 A-4x400

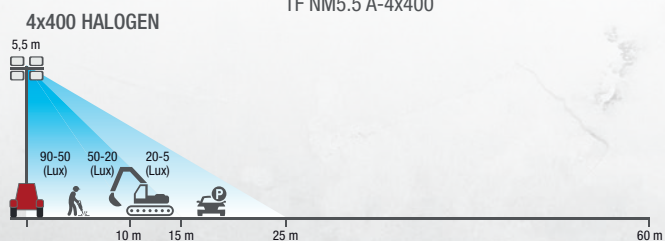

TF NM5.5 A-4x1000

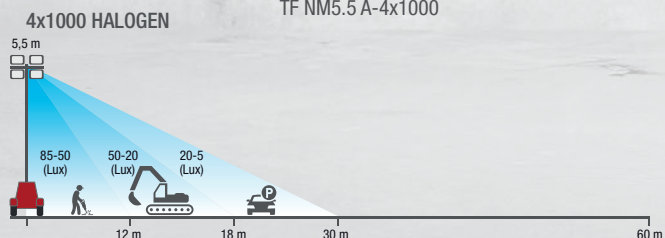

TF NM5.5 J-4x400

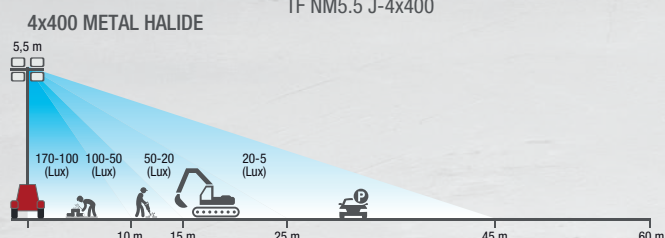

CHARACTERISTICS

- Zinc plated telescopic mast
- Manual winch raise/lower
- Wind proof up to 80 km/h with generator having weight ≥ 80 kg
- Two axes manually adjustable floodlights
- Trolley with wheels and handles
- ON/OFF Switches one for each lamp
- Two axes manually adjustable floodlights
- Safety lock
- Lifting hooks and forklift pockets
- Frame prepared for installing a generating set from 4 to 7 kVA
- Meets EC directives



VERSIONS ON REQUEST

• /



AVAILABLE LAMPS

- TF NM5.5 A-4x400: 4 HALOGEN
- TF NM5.5 J-4x400: 4 METAL HALIDE
- TF NM5.5 A-4x1000: 4 HALOGEN
- TF NM5.5 L-4X150: 4 LED




POWER SUPPLY

- TF NM5.5 A-4x400: 1~ 220-240V 50-60Hz - Plug 16A/32A 230V 3P
- TF NM5.5 J-4x400: 1~ 220-240V 50Hz - Plug 16A/32A 230V 3P
- TF NM5.5 A-4x1000: 1~ 220-240V 50-60Hz - Plug 16A/32A 230V 3P
- TF NM5.5 L-4X150: 100-240V 1~ 50/60 Hz

4x150 LED

TF NM5.5 L-4X150

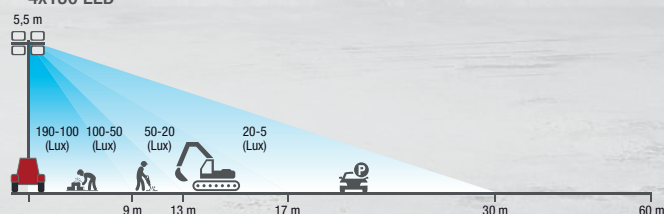


TECHNICAL DATA

DIMENSIONS AND WEIGHT:

	TF NM5.5 A-4X400		TF NM5.5 J-4X400		TF NM5.5 A-4X1000		TF NM5.5 L-4X150	
	tower closed	tower open	tower closed	tower open	tower closed	tower open	tower closed	tower open
Width (mm)	1090	1570	1090	1570	1090	1570	1090	1570
Length (mm)	1430	1730	1430	1730	1430	1730	1430	1730
Height (mm)	2180	5500	2180	5500	2180	5500	2180	5500
Weight (Kg)	195		226		200		226	

FEATURES

	TF NM5.5 A-4X400	TF NM5.5 J-4X400	TF NM5.5 A-4X1000	TF NM5.5 L-4X150
Illuminated area	750 mq	1800 mq	1200 mq	2500 mq
Lux average	16	19	18	13
Total lumen	34400	140000	88000	76300

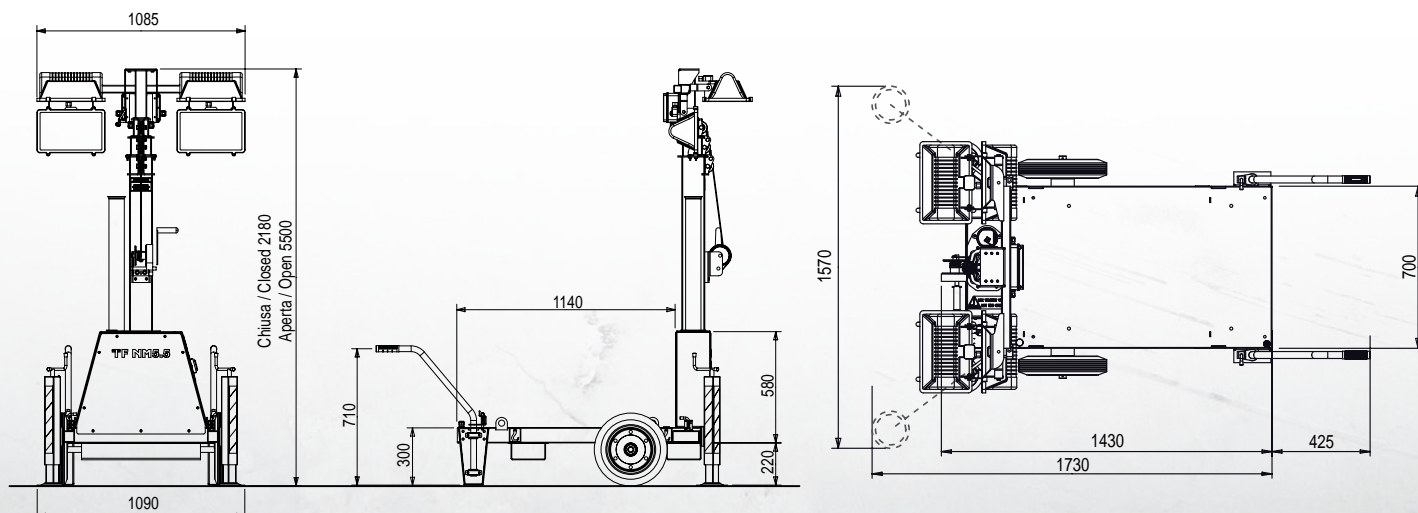

GENERAL INFORMATION

COMPLIANCE GENERATING SETS WITH EC DIRECTIVES AND STANDARDS

2006/42 / EC (Machines Directive)
 2014/35 / EU (Low Voltage Directive)
 2014/30 / EU (EMC Directive)
 2000/14 / EC (Directive Acoustic Emission for machines for use outdoors)
 ISO 8528 (Reciprocating internal combustion engine driven alternating current generating sets)



ISO 9001:2015 - Cert. 0192

WARRANTY

All devices are covered by the manufacturer's warranty.

The company reserves the right to change this specification without notice. For further information please contact the sales department.

© MOSA - Viale Europa, 59 - 20090 Cusago (Milano) - Italy - phone +39-0290352.1 - fax + 39-0290390466 E-mail: info@mosa.it Web site: www.mosa.it

