

LIGHTING KIT TF CUBE I9



CHARACTERISTICS

- Zinc plated telescopic mast
- Hydraulic raise/lower
- 340 degrees manual rotation of the tower
- Wind proof up to 80 km/h
- Safety valve for lowering the tower in case of hydraulic system failure
- Two axes manually adjustable floodlights
- Switches to on/off for lamps
- Base with 4 x adjustable stabilisers, two extendable
- Lifting hooks and forklift pockets
- Three phase power supply plug CEE 32A/ 400V/ 5P
- Meets EC directives

TRANSPORT



TRUCK 13.60 m	22 towers
CONTAINER 12 m	20 towers
CONTAINER 5 m	10 towers



VERSIONS ON REQUEST


• /




AVAILABLE LAMPS

- TF CUBE I9 A-6x1500: 6 HALOGEN
- TF CUBE I9 J-4x1000: 4 METAL HALIDE
- TF CUBE I9 L-4x280: 4 LED


TF CUBE I9 A-6x1500

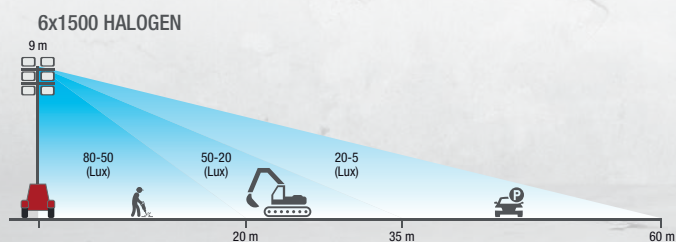

TF CUBE I9 J-4x1000

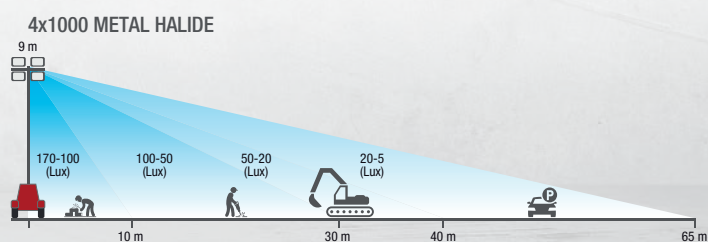

TF CUBE I9 L-4x280

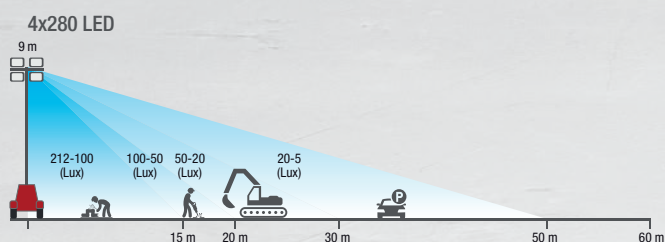

TECHNICAL DATA

DIMENSIONS AND WEIGHT:

	TF CUBE I9 A-6X1500		TF CUBE I9 J-4X1000		TF CUBE I9 L-4X280	
	tower closed	tower open	tower closed	tower open	tower closed	tower open
Width (mm)	1100	2540	1100	2540	1100	2540
Length (mm)	1150	2590	1150	2590	1150	2590
Height (mm)	2080	8700	2080	8700	2080	8700
Weight (Kg)	600		600		600	

FEATURES

	TF CUBE I9 A-6X1500	TF CUBE I9 J-4X1000	TF CUBE I9 L-4X280
Illuminated area	4200 mq	4200 mq	4200 mq
Lux average	16	25	18
Total lumen	216000	340000	144700

