

# GENERATING SET

## GE 8000 KBT

The images are for reference



### FEATURES

- Engine shut down for low oil level
- Heavyduty air cleaner with built-in warm-air system for winter operation
- Three fuel filters: fill neck, in-tank and carburetor inlet
- Muffler with heat shield and spark arrestor
- Circuit breaker
- Protective frame
- Portable
- Meets EC directives of safety



air  
cooling



petrol



three-phase  
power



manual  
recoil

### POWER RATINGS

* Stand-by three-phase power	8 kVA (6.4 kW) / 400V / 11.5A
* PRP three-phase power	7 kVA (5.6 kW) / 400V / 10.1A
* PRP single-phase power	4 kVA / 230V / 17.3A
Frequency	50 Hz
Cos φ	0.8

\* Output powers according to ISO 8528

### DEFINITIONS

Valid declared powers up to the followings environmental conditions: temperature 25°C, altitude 100 meters above sea level)

**LTP stand-by power:** Maximum available power for use with variable loads for a yearly number of hours limited at 500 h. No overload is admitted.

**PRP power:** Continue power with variable loads. Maximum power for use with variable loads for a yearly unlimited numbers of hours.

**COP power:** COP Power: continuous power with constant load. Maximum power for use with constant loads for a yearly unlimited numbers of hours.

## 3000 RPM ENGINE

### 4-STROKE, OHV, NATURAL ASPIRATED

Model	KOHLER CH 440 COMMAND PRO
* Stand-By net power	/
* PRP net power	/
* COP net power	/
Cylinders/ Displacement	1 / 429 cm <sup>3</sup> (0.429 lt.)
Bore / Stroke	89 / 69 (mm)
Compression ratio	8.3: 1
BMEP (Brake Mean Effective Pressure : LTP - PRP)	/
Speed governor type	Mechanical
<b>FUEL CONSUMPTION</b>	
110 % (Stand-By power)	/
100 % of PRP	/
75 % of PRP	/
50 % of PRP	/
<b>COOLING SYSTEM</b>	
Total system cap. - only engine	/
Fan air flow	/
<b>LUBRIFICATION SYSTEM</b>	
Total oil system capacity	/
Oil capacity in sump	1.3 lt.
Oil consumption at full load	/

\* Output powers according to ISO 3046-1

### EXHAUST SYSTEM

Maximum exhaust gas flow	/
Max. exhaust gas temp.	/
Maximum back pressure	/
External diameter exhaust pipe	/
<b>ELECTRICAL SYSTEM</b>	
Starter motor power	/
Battery charging alternator cap.	/
Cold star	/
Cold start aids	/
<b>AIR FILTER</b>	Dry
Combustion air flow	/
<b>HEAT REJECTED AT FULL LOAD</b>	
To exhaust system	/
To water and oil	/
Radiated to room	/
To charge cooler	/

## ALTERNATOR

SYNCHRONOUS, THREE-PHASE, SELF-EXCITED, SELF-REGULATED	
Continuous power	7 kVA
Stand-By power	7.7kVA
Tensione three-phase	400 Vac
Frequency	50 Hz
Cos $\phi$	0.8
Model A.V.R.	/
Voltage regulation acc	$\pm 4 \%$
Sustained short circuit current	3 In
Transient dip (100% load)	< 15 %
Recovery time	/
Efficiency at 100% load	80.5 % (400V - Cos $\phi$ 1)
Insulation	Class H
Connection - Terminals	Series - N°6
Electromagnetic compatibility ( R.F.I. suppr.)	EN55011
Waveform distorsion - THD	< 4 %
Telephone interference - THF	/

REACTANCES (7 KVA - 400 V)	
Direct axis synchronuos - Xd	270 %
Direct axis transient - X'd	20 %
Direct axis subtransient - X''d	6.5 %
Quadrature axis synchronuos. - Xq	150 %
Quadr. axis subtransient - X''q	/
Negative sequence - X2	/
Zero sequence - X0	/
TIME CONSTANTS	
Transient - T'd	33 ms
Subtransient - T''d	5.5 ms
Open circuit - T'do	450ms
Armature - Ta	/
Short-circuit ratio Kcc	0.60
IP protection degree	IP 23
Cooling air flow	0.06/ m³/sec
Coupling - Bearing	Direct J609b - N°1

## GENERAL SPECIFICATION

Tank capacity	7 lt.
Running time (75% of PRP)	/
Start battery	/
IP protection degree	IP 23

Acoustic power LwA (pressure LpA)	99 dB(A) (74 dB(A) @ 7m)
Performance class	G2

## CONTROL PANEL

- Engine switch ON- OFF
- Choke
- Voltmeter
- Circuit breaker
- Earth terminal (PE)

## AVAILABLE SOCKET COMBINATIONS

	VERSIONS	
	STANDARD	SCHUKO
1x400V 16A 3P+N +T CEE	•	•
1x230V 16A 2P+T CEE	•	
1x230V 16A 2P+T Schuko		•

# WEIGHT - DIMENSIONS AND ACCESSORIES

GE 8000 KBT





## DRY WEIGHT OF MACHINE:

- 82 kg

Generating set pictured may include optional accessories.



## DIMENSIONS PICTURE

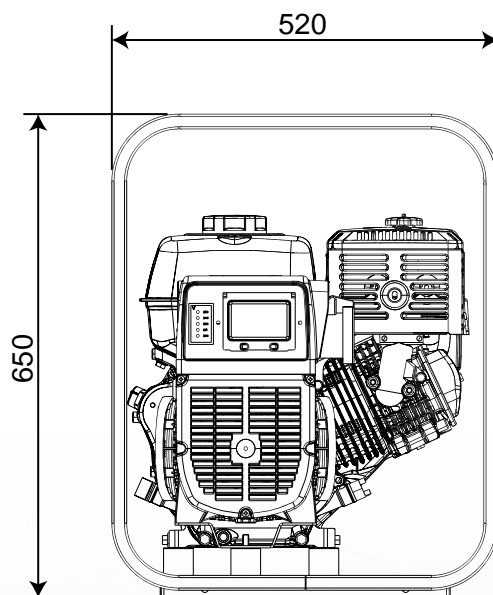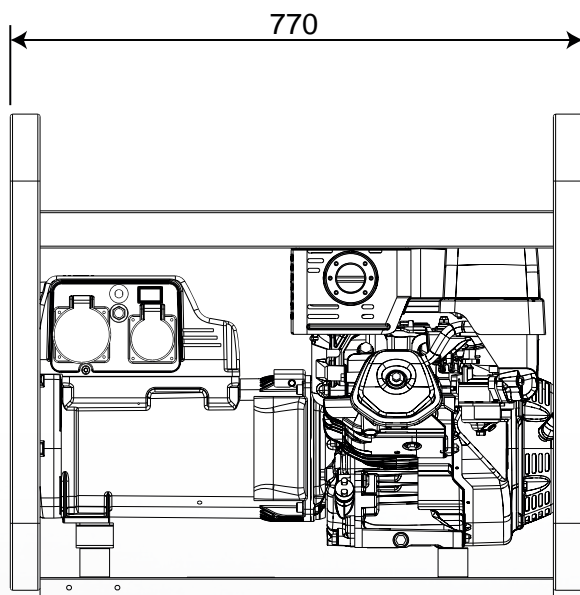

## OPTIONS ON REQUEST

- Earthing kit
- Moving trolley CM8



## VERSIONS ON REQUEST

- Schuko sockets version



## FACTORY INSTALLATION OPTIONS

- ELCB-GFI (Ground Fault Interruptor)

## GENERAL INFORMATION

### COMPLIANCE GENERATING SETS WITH EC DIRECTIVES AND STANDARDS

2006/42 / EC (Machines Directive)  
2014/35 / EU (Low Voltage Directive)  
2014/30 / EU (EMC Directive)  
2000/14 / EC (Directive Acoustic Emission for machines for use outdoors)  
ISO 8528 (Reciprocating internal combustion engine driven alternating current generating sets )



ISO 9001:2015 - Cert. 0192

### WARRANTY

All devices are covered by the manufacturer's warranty.

The company reserves the right to change this specification without notice. For further information please contact the sales department.

© MOSA - Viale Europa, 59 - 20090 Cusago (Milano) - Italy - phone +39-0290352.1 - fax + 39-0290390466 E-mail: info@mosa.it Web site: www.mosa.it

