



DPiL SERIES

SMART Mobile Power Portable Power Station


DP50DiI / DP100DiI / DP150DiI / DP200DiI / DP250DiI



CHARGE IT



Wall Outlet




Solar Panel




Car Charging



POWERALL




12V LED
600+Hours




Smartphone
X100+



Laptop
X30+



Fridge
Up to 40
Hours

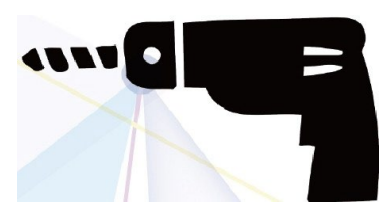

Electric drill
Up to 10
Hours



Air conditioner
Up to 2 Hours

PRODUCT INTRODUCTION

With the DPiL Series Portable Power Station, you have the power to backup your life in any situation. With no fuel, exhaust or noise, just enjoy unlimited power from the wall or the sun. From AC to USB, the DPiL Series features the outputs you need to get the job done both indoors and out. It is ideal for Lights, Smartphone, Tablets, Laptops, Fridge, TV, Backup, Emergency, Power tools and Medical, etc. It can help you easily get rid of power grid constraints, enjoying freedoms of electricity.

PRODUCT ADVANTAGES

- High safety level and long life with LiFePO4 battery
- Strong power battery with large capacity
- Various charging methods
- Multi-protection system
- The intelligent control and monitor by smartphone APP
- Unprecedented portability with "zero gravity"
- Reliable power control system
- Superior output capability
- Conformed to EU and US security certification
- 2 years nationwide warranty

DPiL SERIES SPECIFICATIONS

DPiL SERIES SPECIFICATIONS

Model	DP500il	DP1000il	DP1500il	DP2000il	DP2500il
Rated Power	500VA	1000VA	1500VA	2000VA	2500VA
Peak Power	1000VA	2000VA	3000VA	4000VA	5000VA
Dimensions	530mm (20.9 in)X320mm (12.6 in)X430mm (16.9 in)				
Weight	27kg(60 lbs)	34kg(75 lbs)	34kg(75 lbs)	36kg(79 lbs)	41kg(90 lbs)
Battery Type	LiFePo.				
Battery Capacity	1280Wh, 100Ah(12.8V)	2048Wh, 80Ah(25.6V)			2688Wh, 105Ah(25.6V)
Battery Cycle Life	>2000 cycles				

OUTPUT

AC Output	Output Waveform	Pure-Sine Wave, THD<3%
	Rated Voltage	100/110/120/220/230/240V
	Rated Frequency	60/50Hz
DC Output	Anderson SB50(1)	12V/33A
	Cigarette Lighter	12V/10A
	6mm Port	12V/6A
	USB	5V/2A/1A

CHARGING INPUT

Model		DP500iI	DP1000iI	DP1500iI	DP2000iI	DP2500iI
AC	Wall Outlet	100~120V / 200~240V, Max. 300W, 5.5 hours fully charged	100~120V / 200~240V, Max. 300W, 8.5 hours fully charged		100~120V / 200~240V, Max. 300W, 12 hours fully charged	
	MPPT Control System	18~70V, Max. 300W, 5.5 hours fully charged	36~140V, Max. 600W, 4 hours fully charged		36~140V, Max. 600W, 5 hours fully charged	
Solar	8mm Port	12~15V / 24~30V, Max. 120W 15 hours fully charged	12~15V / 24~30V, Max. 160W 18 hours fully charged		12~15V / 24~30V, Max. 160W 24 hours fully charged	

NOTE

(1).This port is only for DP500iI.

(2).The output specifications are based on the standard ambient temperature: 25°C.

SUNLAND

Hunan Sunland Industry Co., Ltd.